


LION NFPA 1994 Class 2R and NFPA 1992 Ensemble (as incorporated in the 2022 ed. of NFPA 1990)

This Ensemble has been certified to the Ruggedized Class 2 (2R) requirements incorporated into NFPA 1990, *Standard for Protective Ensembles for Hazardous Materials and CBRN Operations*, 2022 edition.

Ruggedized ensembles can be used multiple times where there is no exposure to hazardous materials and CBRN terrorism agents and provide a greater level of physical hazard resistance and increased durability.

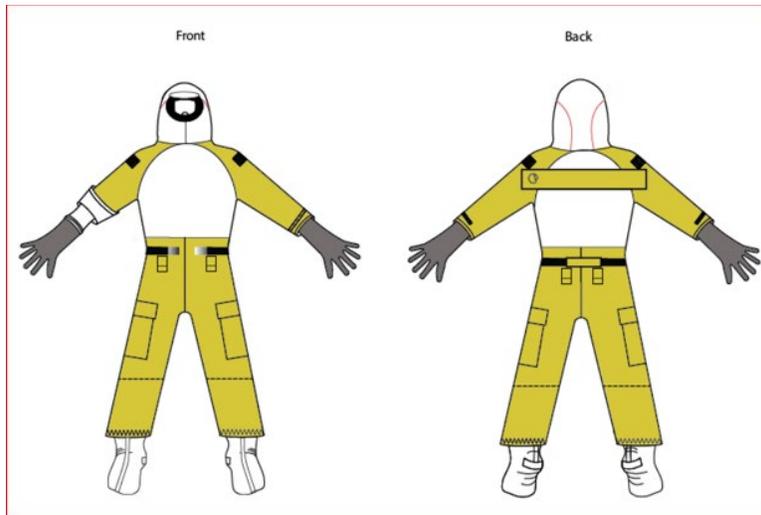

Models: CMTMRG11 AND CMTMRG21 Only

	Questions, write or call immediately: LION 7200 Poe Ave., Suite 400 Dayton, Ohio 45414. 1-800-421-2926		Cert. Mod NFPA 1990 (NFPA 1994), 2022 Ed. NFPA 1990 (NFPA 1992), 2022 Ed.	6690
THIS NONENCAPSULATING LIQUID SPLASH-PROTECTIVE ENSEMBLE MEETS THE BASIC REQUIREMENTS OF NFPA 1992, INCORPORATED IN THE 2022 EDITION OF NFPA 1990, AND FOR THE ADDITIONAL REQUIREMENTS INDICATED BELOW				
ADDITIONAL REQUIREMENTS	YES	NO		
LIMITED FLASH FIRE PROTECTION FOR ESCAPE ONLY IN THE EVENT OF A FLASH FIRE	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
CLAIM OF OPTIONAL BREATHABILITY FOR GARMENT MATERIALS	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
THIS CLASS 2R NONENCAPSULATING HAZARDOUS MATERIALS AND CBRN PROTECTIVE ENSEMBLE MEETS THE REQUIREMENTS OF NFPA 1994, INCORPORATED IN THE 2022 EDITION OF NFPA 1990, FOR THE ABOVE-NOTED CLASS.				
THE TECHNICAL DATA PACKAGE CONTAINS INFORMATION ON HAZARDOUS MATERIALS AND CBRN AGENTS AND ON CHEMICALS AND SPECIFIC CHEMICAL MIXTURES FOR WHICH THIS NONENCAPSULATING ENSEMBLE IS CERTIFIED. CONSULT THE TECHNICAL DATA PACKAGE AND MANUFACTURER'S INSTRUCTIONS BEFORE USE.				
<small>FOR COMPLIANCE WITH NFPA 1992 AND NFPA 1994, THE FOLLOWING ADDITIONAL COMPONENTS MUST BE WORN IN CONJUNCTION WITH THIS LIQUID SPLASH, HAZARDOUS MATERIALS AND CBRN PROTECTIVE ENSEMBLE: DUNLOP® ON-GUARD™ HAZMAX™ (8701200), TINGLEY HAZPROOF® (82330 OR 82331), THOROGOOD® KNOCKDOWN ELITE™ (804-8389, 504-6389), THOROGOOD® HELLFIRE™ KEVLAR® INSULATED RUBBER (807-8000, 507-8000) OR HELLFIRE™ FELT INSULATED RUBBER (8078-8003, 507-8003) BOOTS AND GORE G9492 GLOVE SYSTEM.</small>				
<small>SEE TECHNICAL DATA PACKAGE FOR A LIST OF DETACHABLE COMPONENTS</small>				
<small>OUTER BOOT FOOTWEAR OPTIONS WORN WITH THIS ENSEMBLE MUST MEASURE AT LEAST 140 MM (5.5 IN.) HIGH AND BE CERTIFIED TO NFPA 1951, 1971, 1991, 1992, 1994 OR 1999.</small>				
<small>TO REDUCE THE RISK OF INJURY OR DEATH, YOU MUST ASSEMBLE AND WEAR TOGETHER ALL OF THE ABOVE ITEMS. ALWAYS MAKE SURE THAT ALL ENSEMBLE LAYERS HAVE THE PROPER OVERLAP AND THAT ALL ITEMS FIT PROPERLY. REFERENCE THE USER INSTRUCTION, SAFETY AND TRAINING GUIDE FOR PROPER DRESSING AND WEARING INSTRUCTIONS.</small>				
DO NOT REMOVE THIS LABEL.			REV. 3.0 6/2022	



7200 Poe Avenue, Suite 400
 Dayton, OH 45414
 Phone: (800) 421-2926 or (937) 898-1949
 Fax: (877) 803-1032 or (937) 415-1994
 Internet: www.LIONprotects.com
 E-mail: Info@LIONprotects.com